

Date tehnice pentru produs: IK026150--

# Clemă derivație izolată, 25mmp, 1P, 4 pct conectare, negru

riser clamp



## Schrack-Info

- Suitable for copper conductors
- Protected against unintentional contact (IP20)
- Stackable


## Fișe tehnice

Standard produs	IEC60947-7-1
Tensiune nominală	1000VAC/VDC
Current carrying capacity (A)	152A(2x16mm <sup>2</sup> ); 101A (1x25mm <sup>2</sup> )
Terminal element	Brass (CuZn39Pb2)
Carcasă	PA 6 (halogen-free)
Screws	Steel, Zn thick-film passivated
Reactia la foc	Self-extinguishing
Dimensiuni (mm)	1 polig: 24,8mm x 49,3mm x 55,7mm

## Technische Daten

Verlustleistung:	Geprüft durch SGS Fimko Ltd (siehe Diagramm 1)		
Anschlussquerschnitte: (je Pol)	Rundleiter	Eindrätig oder mehrdrätig	Feindrätig mit Aderenhülse
	2x25mm <sup>2</sup>	2,5 - 25mm <sup>2</sup>	1,5 - 16mm <sup>2</sup>
	Abisolierlänge	19mm	
	Kreuzschlitzschraube	M6 (+/- PZ2)	
	Anzugdrehmoment	2,5Nm	
	2x16mm <sup>2</sup>	2,5 - 16mm <sup>2</sup>	1,5 - 10mm <sup>2</sup>
	Abisolierlänge	19mm	
	Kreuzschlitzschraube	M6 (+/- PZ2)	
	Anzugdrehmoment	2,5Nm	
Flammwidrigkeit:	Selbstverlöschend		

## Desen dimensional: Clemă derivație izolată, 25mmp, 1P, 4 pct conectare, negru

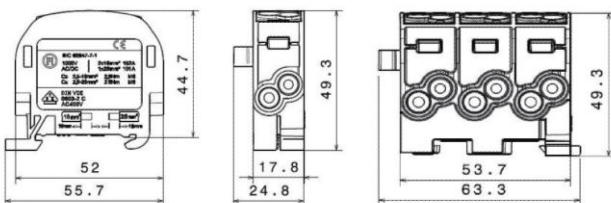

Descriere	Cod comandă
Clemă derivație izolată, 25mmp, 1P, 4 pct conectare, negru riser clamp	IK026150