

DATA SHEET:  
MAIN BRANCH TERMINAL, 35mm<sup>2</sup>, 4 INPUTS 4 OUTPUTS BLUE




SCHRACK-INFO

The product conforms to ROHS Directives of the EG.

TECHNICAL DATA

Regulations:	VDE acc. to DIN VDE 0603-2
Nominal voltage:	690 V AC
Current rating:	125 A
Cross sections:	<b>4 x 35 mm<sup>2</sup></b> 4 – 35 mm <sup>2</sup> , round conductors (solid and stranded) 2,5 – 25 mm <sup>2</sup> , stranded wire with ferrule
	Cross recessed screw: M8 +/- PZ2
	Tightening torque: 3,5 Nm
	Stripping length: 22 mm
	<b>4 x 25 mm<sup>2</sup></b> 2,5 – 25 mm <sup>2</sup> , round conductors (solid and stranded) 1,5 – 16 mm <sup>2</sup> , stranded wire with ferrule
	Cross recessed screw: M6 +/- PZ2
	Tightening torque: 2,5 Nm
	Stripping length: 18 mm
Materials:	Terminal Body: Brass (CuZn39Pb2), bare
	Housing: PA 6 (Halogen Free)
	Screws: Steel, zinc thick film passivated
Flame resistance:	Self extinguishing
Mechanical Data:	Dimensions (WxHxD): 29mm x 49.3mm x 55.1mm

DIMENSIONS

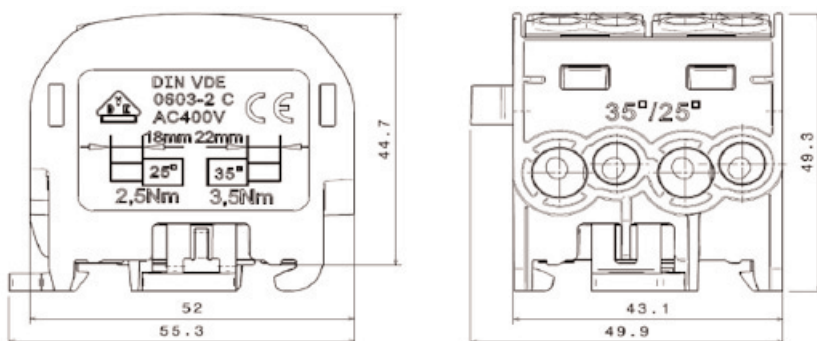

DESCRIPTION	ORDER NO.
Main branch terminal, 35mm <sup>2</sup> , 4 inputs 4 outputs blue	IK026222