

## ■ DATA SHEET:

### MAIN BRANCH TERMINAL, 35mm<sup>2</sup>, 4 INPUTS 4 OUTPUTS YELLOW/GREEN




#### ■ SCHRACK-INFO

The product conforms to ROHS Directives of the EG.

#### ■ TECHNICAL DATA

Regulations:	VDE acc. to DIN VDE 0603-2
Nominal voltage:	690 V AC
Current rating:	125 A
Cross sections:	<b>4 x 35 mm<sup>2</sup></b>
	4 – 35 mm <sup>2</sup> , round conductors (solid and stranded)
	2,5 – 25 mm <sup>2</sup> , stranded wire with ferrule
	M8 +/- PZ2
	3,5 Nm
	22 mm
	<b>4 x 25 mm<sup>2</sup></b>
	2,5 – 25 mm <sup>2</sup> , round conductors (solid and stranded)
	1,5 – 16 mm <sup>2</sup> , stranded wire with ferrule
	M6 +/- PZ2
	2,5 Nm
	18 mm
Materials:	Brass (CuZn39Pb2), bare
Housing:	PA 6 (Halogen Free)
Screws:	Steel, zinc thick film passivated
Flame resistance:	Self extinguishing
Mechanical Data:	Dimensions (WxHxD): 29mm x 49.3mm x 55.1mm

#### ■ DIMENSIONS

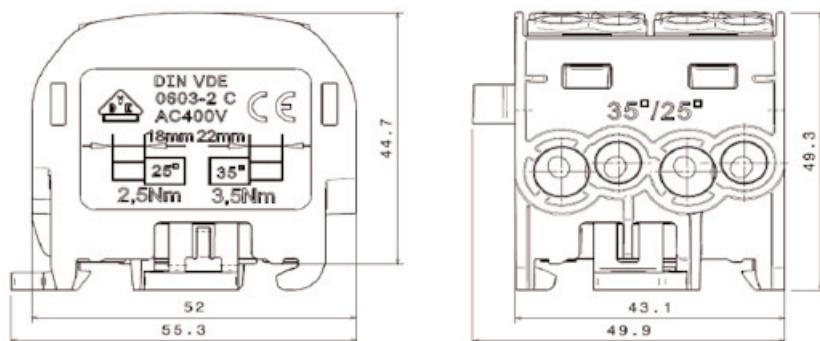

DESCRIPTION	ORDER NO.
Main branch terminal, 35mm <sup>2</sup> , 4 inputs 4 outputs yellow/green	IK026232